

ideal
BATHROOMS

 **lazzarini**

TOWEL RADIATOR
BROCHURE | 2020





lazzarini

"The spirit of a dynamic team committed each day to develop products that combine artistic taste and functionality allowing you to make each living space unique with exclusive heating elements accessible to all"

Luca Lazzarini



Classic

Roma P - 2



Design

Asti P - 4

Pieve P - 6

Randa P - 8

Palermo P - 10

Venezia P - 12

Todi P - 14

Capri P - 16

Empoli P - 18

Livorno P - 20



Electric

E-Pieve P - 22

E-Palermo P - 24

E-Todi P - 26



Accessories

..... P - 28



ALL PRICES INCLUDE VAT AT +20%

• Product available in stock



 DUAL FUEL USE

 WALL/FLOOR FIXING




 CHROME

 SPECIAL COLOUR

 **EN** **442** **EURONORM**

Roma $\varnothing = 25$ mm



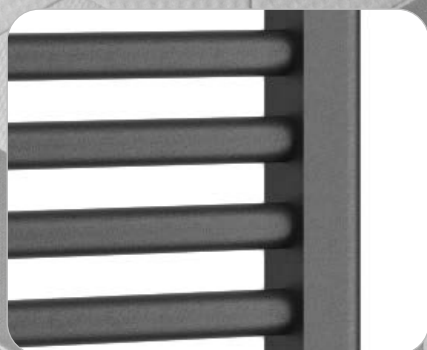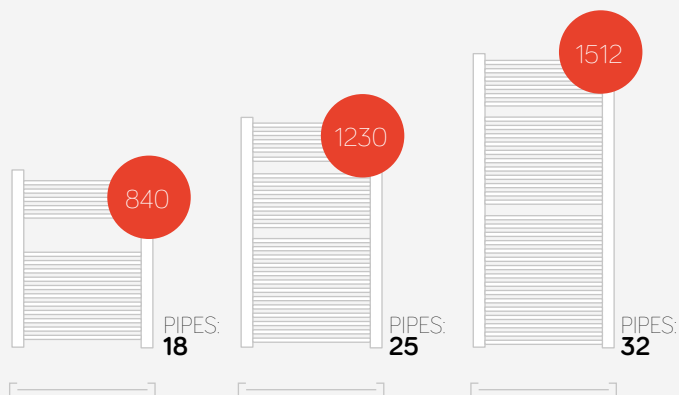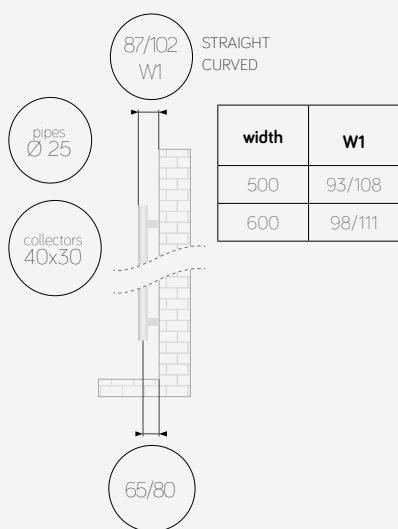

Chrome • straight

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating elem. watt	price £
386375	840	400	350	6,3	4,0	236	1007	200	£ 117.60
386377	840	500	450	7,5	4,7	292	1249	300	£ 126.00
386380	1230	400	350	9,0	5,6	321	1382	300	£ 151.20
386382	1230	500	450	10,5	6,7	400	1724	300	£ 162.00
386386	1512	400	350	11,2	7,1	395	1700	300	£ 180.00
386388	1512	500	450	13,3	8,5	491	2113	500	£ 192.00



Anthracite VOV 12 • straight

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating elem. watt	price £
383470	840	500	450	7,5	4,7	426	1819	500	£ 88.80
383404	1230	500	450	10,5	6,7	605	2597	700	£ 110.40
388564	1512	500	450	13,3	8,5	736	3153	700	£ 129.60

50

ALSO 50 MM CONNECTIONS



CHROME





SPECIAL COLOUR



EN  **EURONORM**
442

Asti

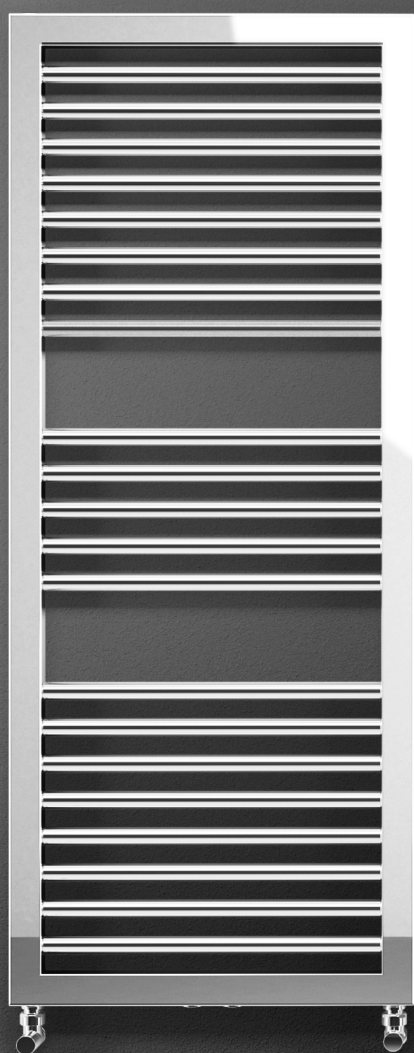

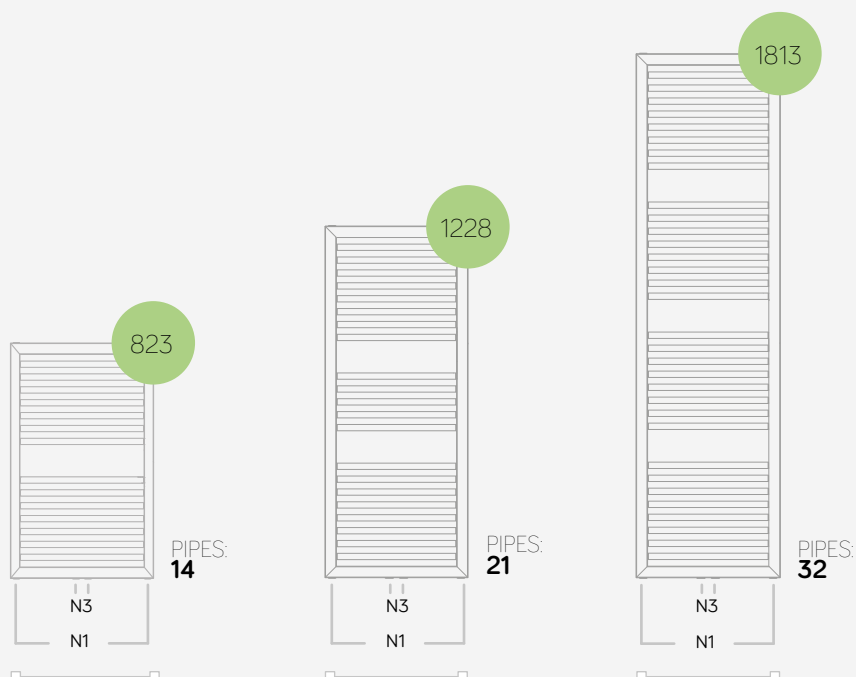

Chrome • straight

code	height mm	width mm	interaxis N1 mm	interaxis N3 mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	price £
384849	823	500	450	50	7,0	4,3	286	1225	£ 326.40
384851	1228	500	450	50	9,7	5,9	393	1683	£ 372.00
384853	1813	500	450	50	13,7	8,6	578	2959	£ 468.00

5 AVAILABLE CONNECTIONS (LATERAL, CENTRAL, TOP)



Anthracite VOV 12 • straight

code	height mm	width mm	interaxis N1 mm	interaxis N3 mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	price £
384843	823	500	450	50	6,9	4,3	395	1686	£ 248.40
384845	1228	500	450	50	9,5	5,9	586	2512	£ 276.00
384847	1813	500	450	50	13,5	8,6	861	3675	£ 324.00



REVERSIBLE



ONLY 50 MM CONNECTIONS



CHROME





SPECIAL COLOUR



EN  **EURONORM**
442

Pieve

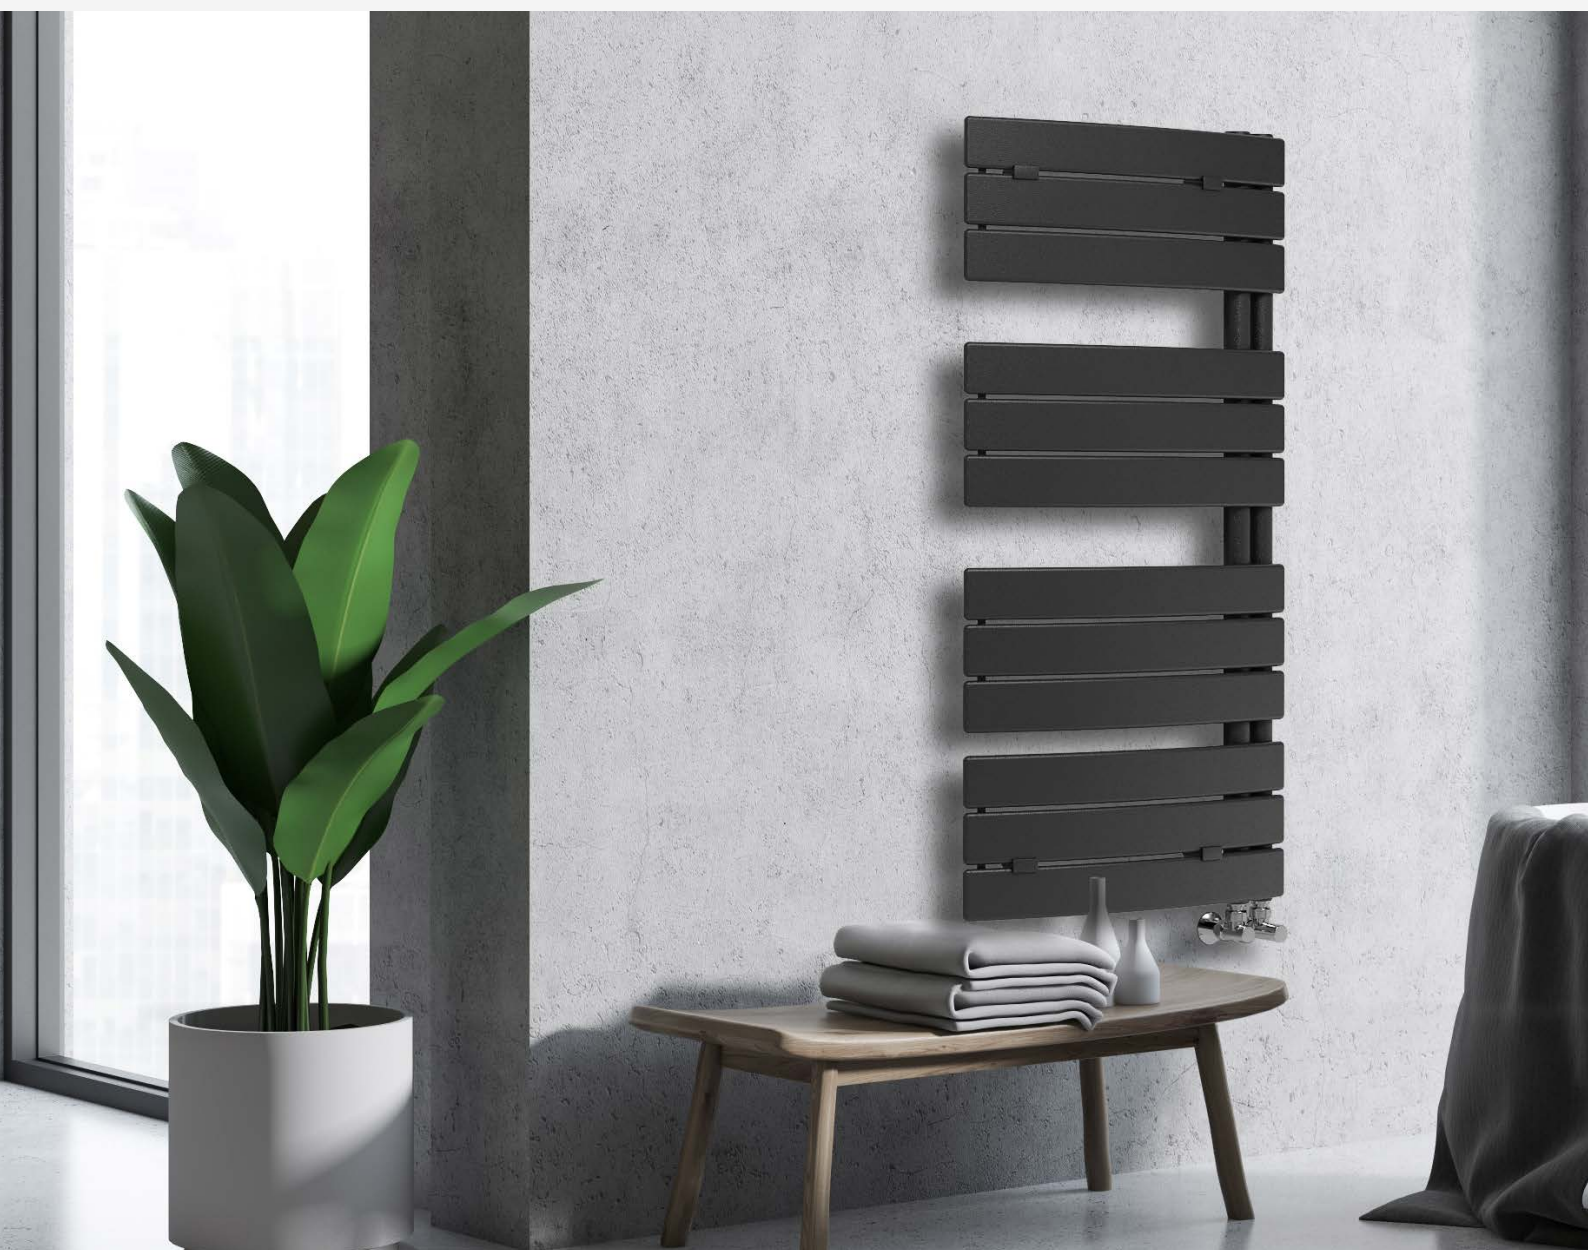

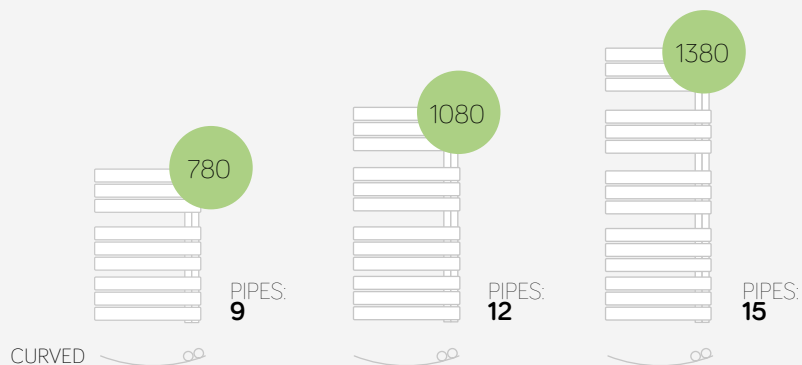

Chrome

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	price £
386306	780	550	50	10,9	3,7	248	1086	£ 351.60
386307	1080	550	50	15,0	5,5	336	1464	£ 465.60
386308	1380	550	50	18,6	6,0	421	1833	£ 547.20

Anthracite VOV 12

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	price £
386299	780	550	50	11,1	3,7	365	1594	£ 249.60
386300	1080	550	50	15,2	5,5	500	2177	£ 295.20
386301	1380	550	50	18,8	6,0	624	2710	£ 340.80



"Altea" robehook

(Code/Art. Nr.: 383981 • £ 26.40 • 2 pc)

See full list of available accessories at page 28



REVERSIBLE



DUAL FUEL USE



ONLY 50 MM CONNECTIONS



CHROME





SPECIAL COLOUR



Randa



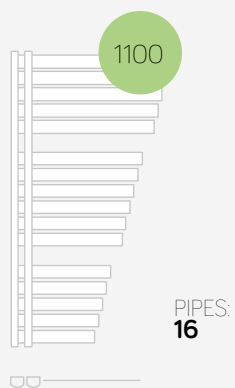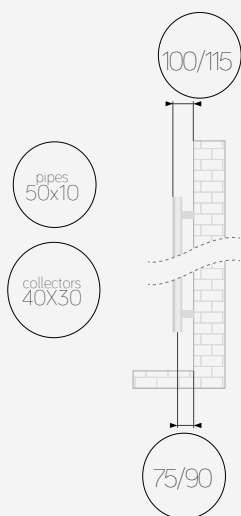

Chrome

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
387084	1100	590	50	11,6	3,9	295	1283	300	£ 504.00

Anthracite VOV 12

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
388668	1100	590	50	12,3	3,9	428	1857	500	£ 376.80



 DUAL FUEL USE



 CHROME

 SPECIAL COLOUR

 **EN 442** ★ Euronorm

Palermo



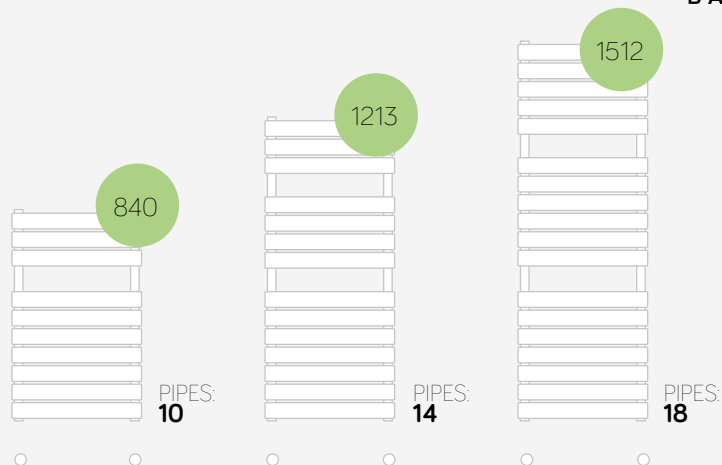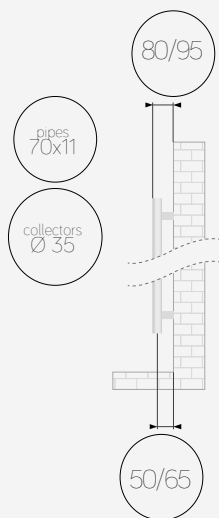

"Iris" robehook

Code/Art. Nr.: 383979 • £ 26.40 • 2 pc



See full list of available accessories at page 28

Chrome

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
386987	840	500	450	10,8	4,0	253	1082	300	£ 309.60
386988	1213	500	450	15,5	5,7	359	1546	300	£ 408.00
386989	1512	500	450	19,7	7,1	501	2171	500	£ 498.00

Anthracite VOV 12

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
386975	840	500	450	11,1	4,0	422	1799	500	£ 230.40
386976	1213	500	450	14,9	5,7	590	2519	700	£ 300.00
386977	1512	500	450	18,7	7,1	727	3109	700	£ 336.00



 DUAL FUEL USE



 CHROME

 SPECIAL COLOUR

 **EN**  **EURONORM**
442

Venezia



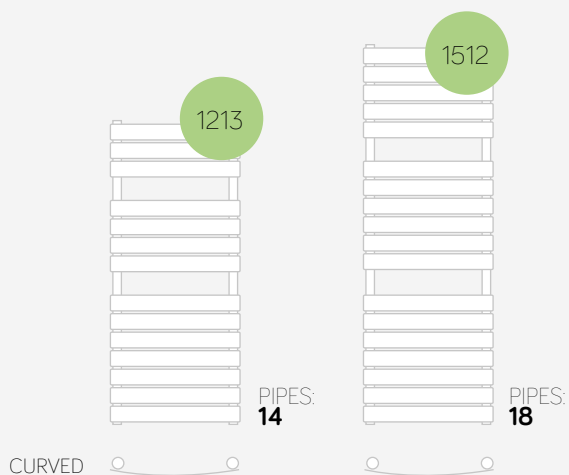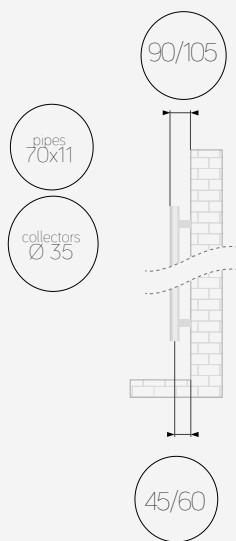

Chrome

code	height mm	width mm	interaxis mm	weight kg	water lt	watt $\Delta 50^{\circ}\text{C}$	btu $\Delta 60^{\circ}\text{C}$	heating element watt	price £
381903	1213	493	438	15,7	5,7	359	1546	300	£ 408.00
381904	1512	493	438	19,7	7,1	501	2171	500	£ 489.60

Anthracite VOV 12

code	height mm	width mm	interaxis mm	weight kg	water lt	watt $\Delta 50^{\circ}\text{C}$	btu $\Delta 60^{\circ}\text{C}$	heating element watt	price £
382115	1213	493	438	14,9	5,7	590	2519	700	£ 286.80
382116	1512	493	438	18,7	7,1	727	3109	700	£ 334.80





DUAL FUEL USE



CHROME





SPECIAL COLOUR



EN  **EURONORM**
442

Todi

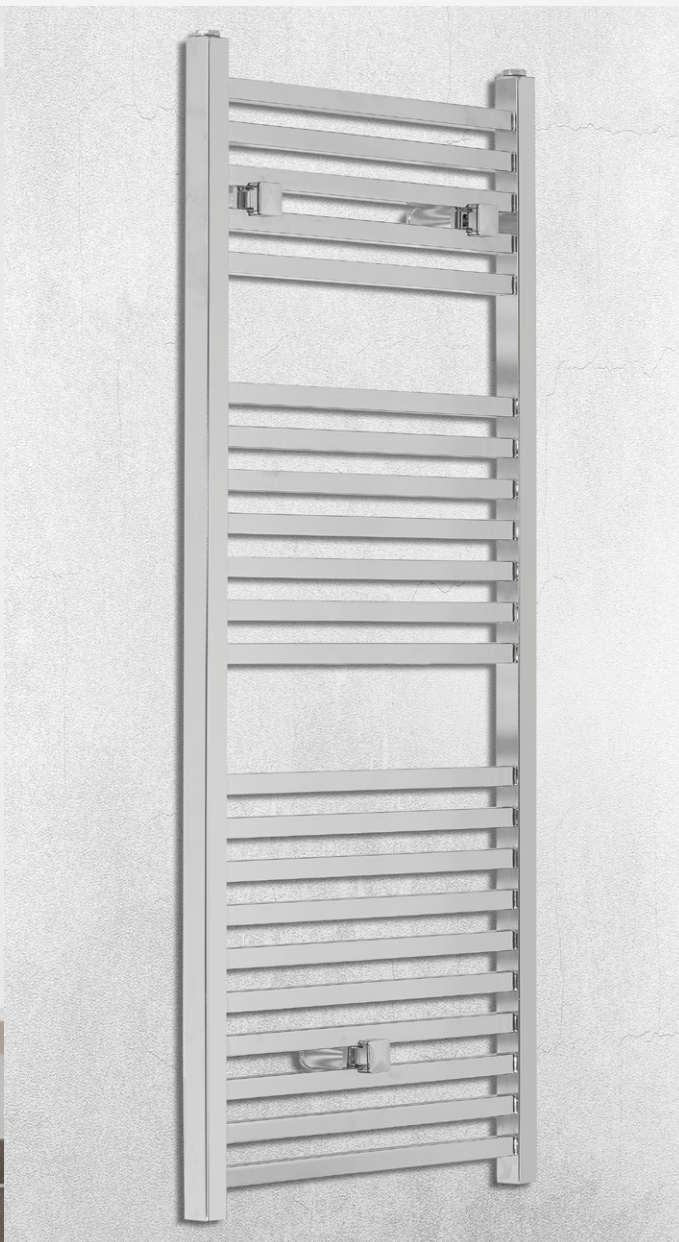


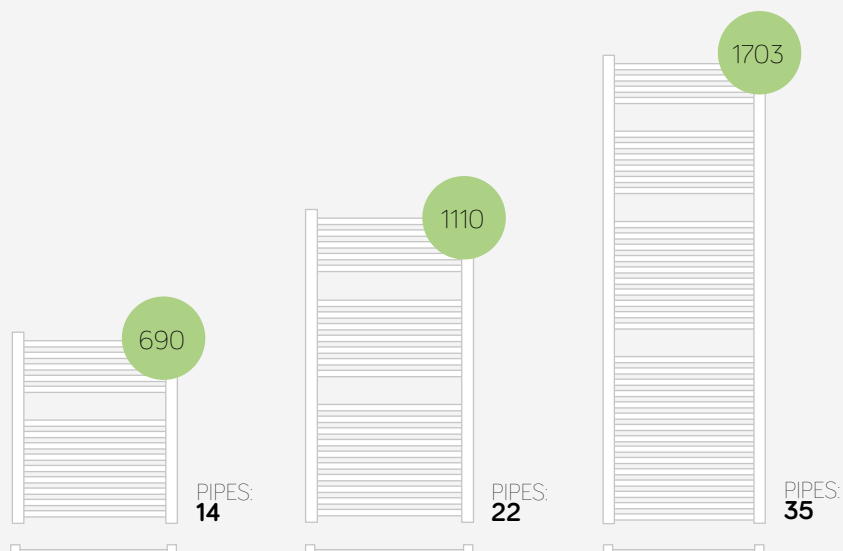


Chrome

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
386546	690	500	470	5,5	3,1	224	966	200	£ 210.00
386548	1110	500	470	8,6	4,7	323	1389	300	£ 316.80
386552	1703	500	470	13,3	7,5	531	2290	500	£ 476.40

Anthracite VOV 12

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
383411	1110	500	470	8,7	4,8	506	2171	500	£ 192.00

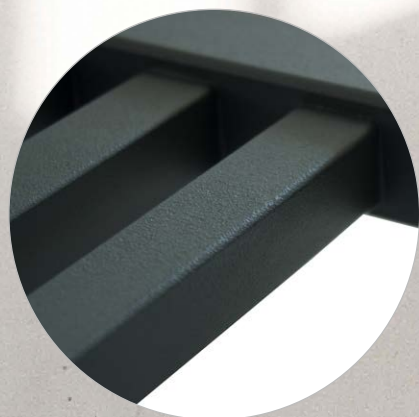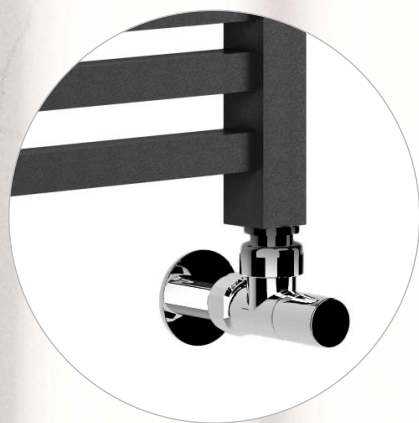

"Calla" robehook

Code/Art. Nr.: 388133 • £ 12.00

See full list of available accessories at page 28



DUAL FUEL USE



CHROME




SPECIAL COLOUR



EN  **EURONORM**
442

Capri



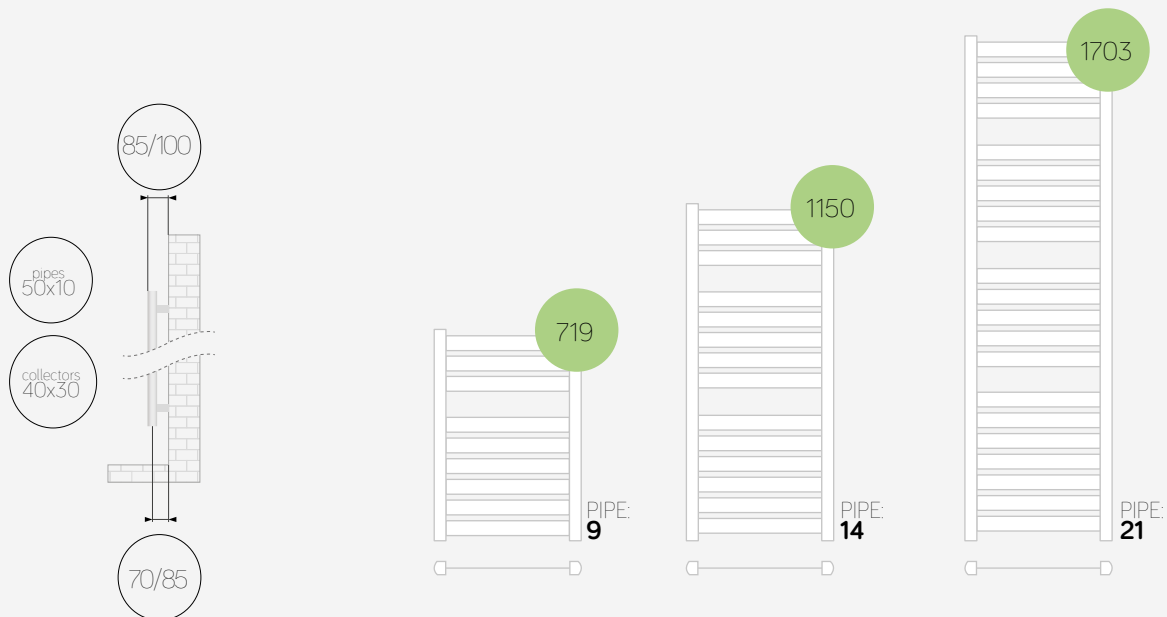


Chrome

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
386134	719	500	450	6,9	2,5	203	871	200	£ 198.00
386135	1150	500	450	10,9	3,8	300	1287	300	£ 252.00
386137	1703	500	450	16,4	6,0	442	1901	500	£ 351.60

Anthracite VOV 12

code	height mm	width mm	interaxis mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	heating element watt	price £
386127	719	500	450	7,0	2,5	325	1386	300	£ 139.20
386128	1150	500	450	10,9	3,8	488	2089	500	£ 192.00
388330	1703	500	450	16,3	6,0	727	3116	800	£ 254.40

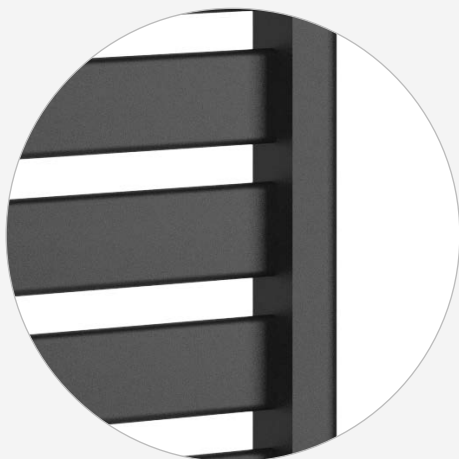



VERTICAL AND
HORIZONTAL INSTALLATION *



CHROME





SPECIAL COLOUR



EN  **EURONORM**
442

Livorno

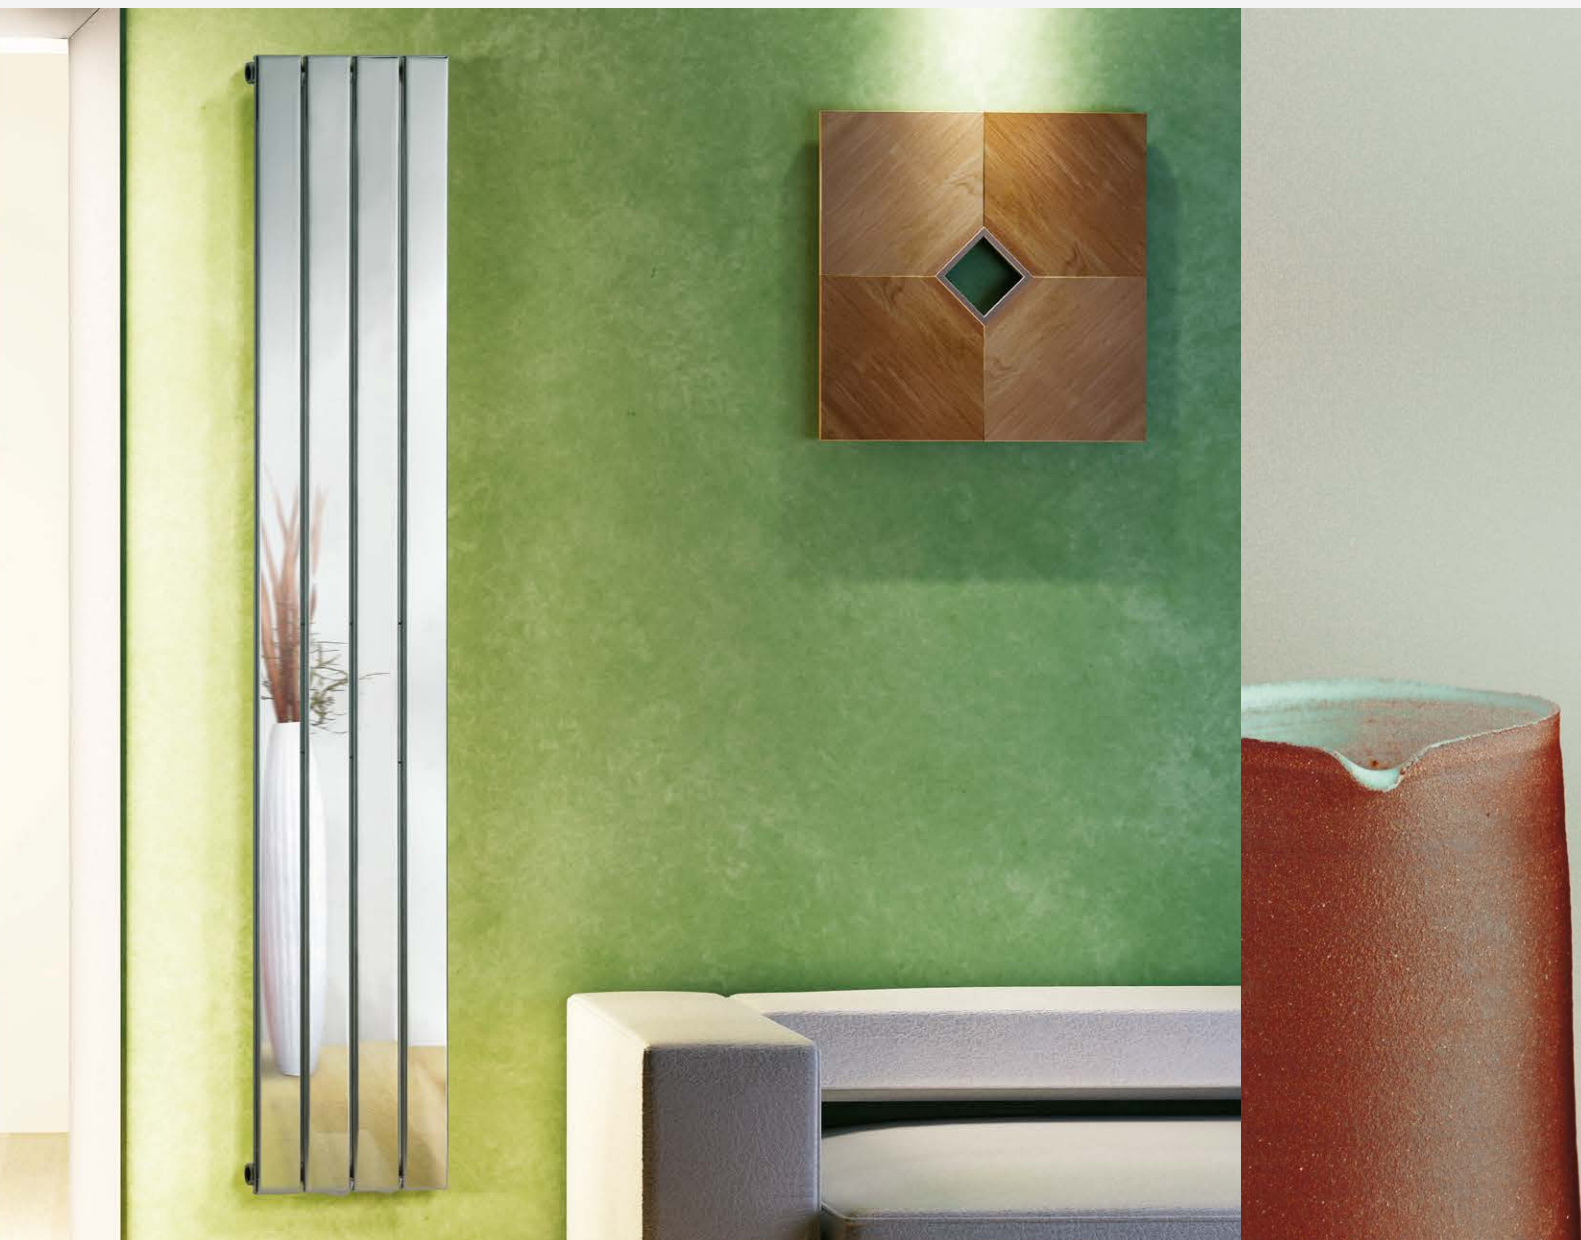

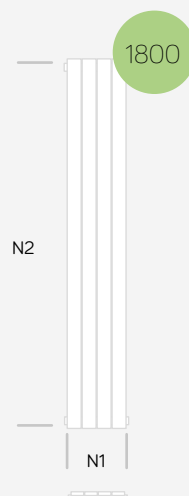

Chrome

code	height mm	width mm	interaxis N1 mm	interaxis N2 mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	elements	price £
386777	1800	309	309	1750	13,2	4,2	354	1539	4	£ 402,00

Anthracite VOV 12

code	height mm	width mm	interaxis N1 mm	interaxis N2 mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	elements	price £
386710	1800	309	309	1750	13,2	4,2	566	2443	4	£ 276,00



* IN CASE OF HORIZONTAL INSTALLATION, INCLUDE IN THE ORDER THE OPTIONAL BRACKET KIT

code	finish	description	price £
381308	Chrome	Bracket Kit	£ 30.00
381901	Anthracite	Bracket Kit	£ 30.00

50

ALSO 50 MM CONNECTIONS



CHROME

SPECIAL COLOURS

★ ★ ★
EN **EURONORM**
442

Empoli



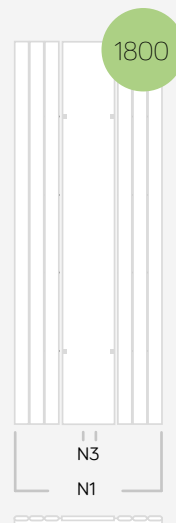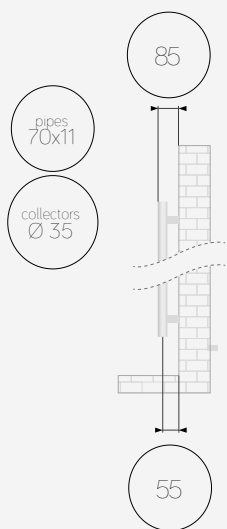

"Calla" magnetic robehook
Code/Art. Nr.: 385021 • £ 46.80



See full list of available accessories at page 28

Chrome

code	height mm	width mm	interaxis N1 mm	interaxis N3 mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	elements	price £
383856	1800	600	650	50	23,1	4,7	419	1819	4	£ 756,00

Anthracite VOV 12

code	height mm	width mm	interaxis N1 mm	interaxis N3 mm	weight kg	water lt	watt Δ 50°C	btu Δ 60°C	elements	price £
383854	1800	600	650	50	26,9	4,7	674	2901	4	£ 540,00



6 CONNECTION AVAILABLE (LATERAL, CENTRAL, ON TOP)





E-Pieve



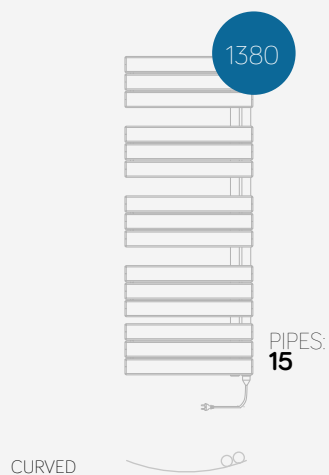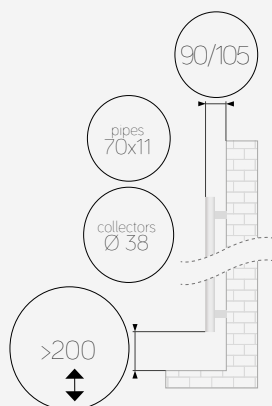

Anthracite VOV 12 • curved

code	height mm	width mm	weight kg	heating elem. watt	heating elem. btu	price £
389056	1380	550	24,3	500	1706	£ 420,00

* With shuko plug

The plug can be cut and this does not impact the full warranty

"Altea" robehook

Code: 383981 • £ 26.40 • 2 pc



See full list of available accessories at page 28





E-Palermo



"Iris" robehook
Code: 383979 • £ 26.40 • 2 pc



See full list of available accessories at page 28

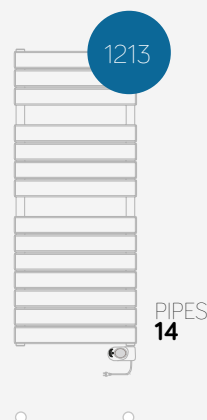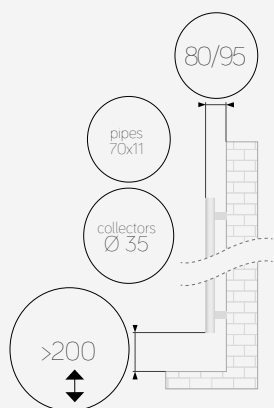

Anthracite VOV 12 • straight

code	height mm	width mm	weight kg	heating elem. watt	heating elem. btu	price £
389051	1213	500	20,1	500	1706	£ 450,00

Chrono

The user can set the desired temperature for every hour of the day and repeat the weekly programming.

Comfort

The thermostat keeps the room at the temperature set by the user.

Open window detection

When a window in the room is opened, the thermostat switches off for maximum 30 minutes.

Night mode

Room temperature is set lower than the Comfort temperature.

Antifreeze

The thermostat prevents the room temperature from dropping below 7°C.

2h booster

Operation at maximum power for 2 hours regardless of the set temperature.


Backlit display


The set temperature and mode, time and programming are displayed on a backlit display.





E-Todi

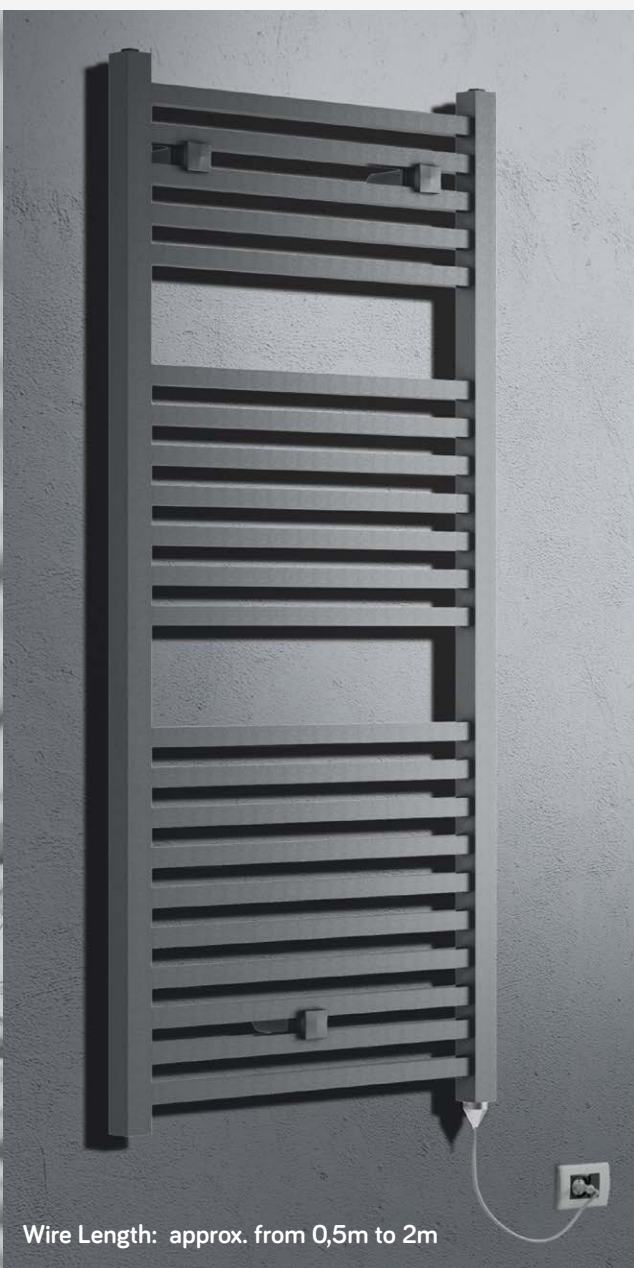

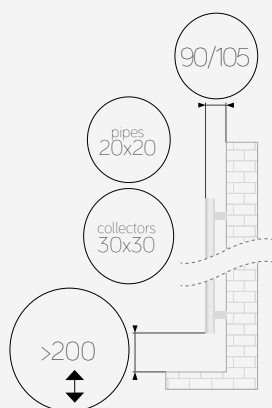

Chrome • straight

code	height mm	width mm	weight kg	heating elem. watt	heating elem. btu	price £
388137	1110	500	13,5	300	1024	£ 360,00

* With shuko plug

Anthracite VOV 12 • straight

code	height mm	width mm	weight kg	heating elem. watt	heating elem. btu	price £
388139	1110	500	13,5	500	1706	£ 264,00

* With shuko plug

"Calla" robehook

Code: 388133 • £ 12.00

See full list of available accessories at page 28



The plug can be cut and this does not impact the full warranty



«Calla» robehook			
chrome	fixing: radiator	388133	£ 12.00 •
	fixing: magnetic	385021	£ 46.80 •



«Calla» robehook Emoticon			
love	388805	£ 21.60	•
kiss	388806	£ 21.60	•
smile	388807	£ 21.60	•
joke	388808	£ 21.60	•



«Iris» robehook for flat pipe		
anthracite*	383979	£ 26.40 •

* 2 pcs per box



«Altea» robehook for flat pipe		
anthracite*	383981	£ 26.40 •

* 2 pcs per box



«Azalea» robehook		
chrome	385036	£ 21.60 •



«Ibiscus» towel rail			
chrome	400 mm	385026	£ 84.00 •
	500 mm	385027	£ 90.00 •


«Bandiera» wall/floor fixing kit		
chrome	385978	€ 174,00 •

CALLA: FITTING EXAMPLE




- 1- Put the screwed base behind the radiator at the desired point



- 2- Screw the robehook and fasten with a light pressure

AZALEA: FITTING EXAMPLE


- Lean the robehook on the upper side of the tube, then pull to fix the robehook to the tube

IBISCUS: FITTING EXAMPLE


- 1 - Put the screwed base behind the radiator at the desired point
- 2 - Use a 5 exagonal key to block the screw


The bar can be adjusted at the desired size

CALLA MAGNETIC: FITTING EXAMPLE


Capacity: max kg 3,0

Compatibility Accessories / Radiators

	Calla	Calla magnetic	Azalea	Iris / Altea	Ibiscus	Wall/floor fixing kit
Roma straight	•		•		•	•
Asti	•				•	
Pieve		•		•		
Pieve Contract		•		•		
Randa		•				
Palermo		•		•		
E-Palermo		•		•		
Venezia		•		•		
Todi	•					
Todi Electric	•					
Capri	•	•			•	
Merano	•				•	
Empoli		•				
Livorno		•				

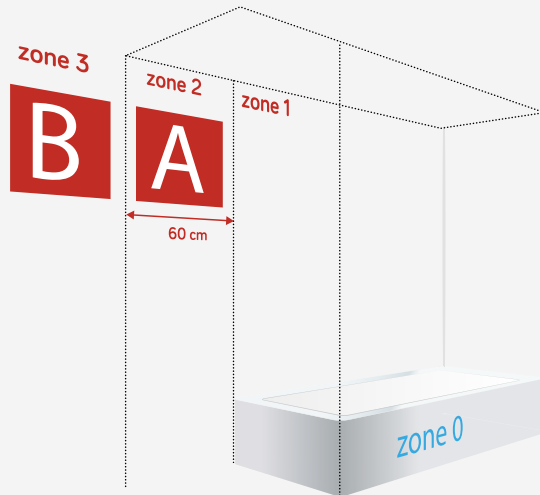

Instructions

for dual-fuel use radiators


CL1 and CL2 cartridge heaters must be approved IPx4 to be installed in bathrooms.

zone 0 and zone 1: it is highly recommended not to install electrical devices in these areas;

zone 2: only electrical devices with CL2 cartridge heater (with or without plug) and control units not reachable from bath or shower, can be installed;

zone 3: electrical devices with CL1 or CL2 cartridge heater, can be installed. Plugs and control units must not be in zone 2;

- The power of the cartridge heater must not exceed 20% of the power of thermal emission of the radiator ($\Delta T = 50 \text{ K}$ and/or $75/65/20 \text{ }^\circ\text{C}$, EN 442)
- **NEVER** "dry test" the cartridge heater by switching it on unless it is fully screwed into the radiator and immersed into the liquid. Otherwise this will cause damage;
- The central heating and electrical options should never be used simultaneously. This can damage the product.
- **SUMMER USE:** switch off the central heating and vent the radiator. Close the flow valve (only). Activate the cartridge heater;
- **WINTER USE:** De-activate the cartridge heater., open the flow valve and turn on the central heating.
- Electric installation must correspond to local regulation. The plug must remain reachable;
- In case of direct connection to the net (without plug), a switch must be installed (poles must be separated and kept at a min. distance of 3 mm from each other);
- cartridge heater and cable must be replaced or repaired only by the manufacturer;
- electrical radiator connected to central heating, must be totally filled with water leaving last pipe empty. The radiator should always be de-aerated;
- do not change the defined filling volume of the electrical radiator;
- do not switch on the cartridge heater before immersion;
- Cartridge heaters are provided with 2 safety systems:
 1. internal thermostat stops heating element at 80°C ;
 2. a fuse will interrupt the heating element at 152°C (in this case it must be replaced);

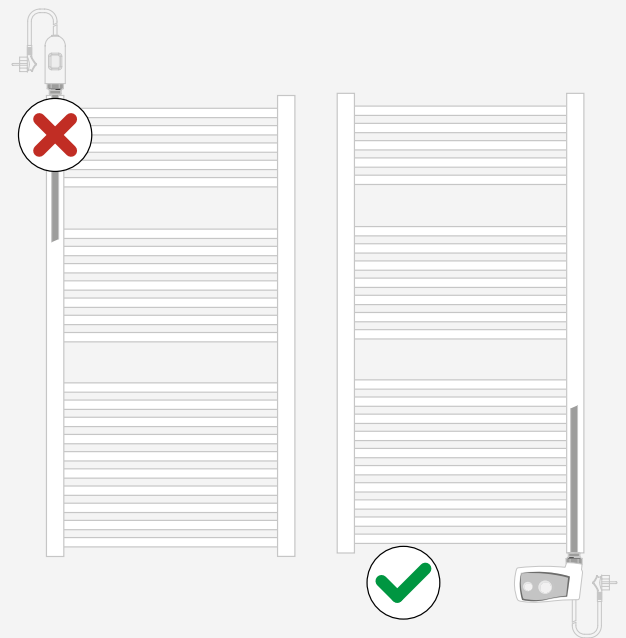

Pieve



Palermo



Randa



Capri



Asti





FOR

ideal
BATHROOMS



 **lazzarini**

FOR

ideal
BATHROOMS

www.idealbathrooms.com
www.lazzariniiradiatori.it

